

ARF-A MIDIUUM PRESSURE BACKWARD FAN (SINGLE INLET TYPE)

- Blades are made by a press machine, so that the structure is solid.
- Blades are backward, axial turning power has a load stabilizer function.

Characteristics:

- (1) High efficiency is more than 70%.
- (2) Have wing centrifugal, load stabilizer centrifugal, and no noise centrifugal characteristics.
- (3) Can be connected to a vacuum machine.
- (4) Low noise level.

Application:

- (1) Evacuation and collection of dust for grinding and powder factories.
- (2) Powerful ventilation and air conditioning of buildings.
- (3) Air supply for boilers.

中壓後傾式風機 (單口吸入式)


- 葉片沖壓成型，結構堅固耐用。
- 葉片向後彎曲，對軸轉力有定載作用。

特點：

- (1) 效率高達70%以上。
- (2) 具備翼形離心式，定載離心式，及靜音離心式之特性。
- (3) 可附集塵器使用。
- (4) 噪音低。

用途：

- (1) 研磨廠、粉類工廠之排塵及集塵處理。
- (2) 強力通風及建築物之空調用。
- (3) 鍋爐之送風用。

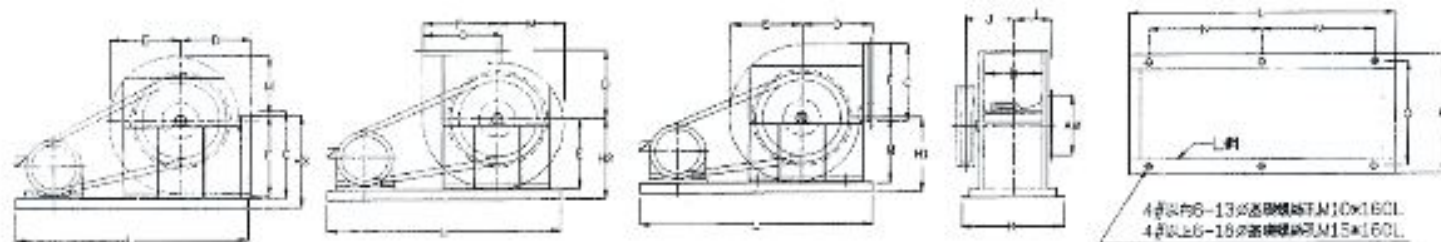

Dimension 外型尺寸

UNIT : mm

SIZE	ITEM	A ϕ	B	C	D	E	F	H1	H2	H3	I	J	K	L	M	O	N	重量KG
ARF-A2		340	230	340	225	265	308	262	294	350	175	230	330	980	232	280	465	63
ARF-A2 1/2		400	280	400	275	330	385	320	360	435	207	290	380	1070	290	330	510	90
ARF-A3		500	330	480	330	395	462	378	426	512	248	330	430	1270	348	380	610	140
ARF-A3 1/2		580	400	590	380	460	539	436	492	589	279	360	500	1300	406	450	625	180
ARF-A4		640	420	620	440	530	616	494	558	666	325	390	520	1320	464	460	635	215
ARF-A4 1/2		760	515	670	490	595	693	552	624	743	356	435	610	1550	522	550	750	274
ARF-A5		820	626	800	540	660	770	630	710	835	388	470	756	1700	580	720	825	338
ARF-A5 1/2		902	686	880	590	725	847	688	776	912	419	505	816	1900	638	780	925	442
ARF-A6		985	750	960	650	790	924	746	842	989	475	565	880	2120	696	830	1035	655
ARF-A7		1150	874	1120	750	925	1080	872	984	1155	538	635	1024	2360	812	950	1155	895
ARF-A8		1310	1000	1280	850	1060	1230	988	1120	1305	600	700	1150	3080	928	1075	1515	1150
ARF-A9		1480	1130	1440	950	1190	1390	1120	1260	1490	665	800	1330	3400	1050	1255	1675	1400
ARF-A10		1640	1250	1600	1065	1320	1540	1230	1390	1640	755	870	1450	3500	1160	1375	1725	2000
ARF-A11		1900	1320	1850	1260	1487	1765	1310	1510	1900	795	950	1588	3700	1287	1488	1825	2500
ARF-A12		2120	1500	2060	1390	1655	1965	1460	1680	2130	885	1030	1768	4100	1431	1668	2025	3500
ARF-A14		2360	1700	2300	1540	1850	2200	1640	1880	2350	1005	1200	1969	4400	1602	1869	2175	4150